ACV

DISCOVER THE ACV PRODUCT RANGE



Gas fired boilers



Electric boilers



Water heaters & cylinders

acv.com/gb |

WHO ARE WE?

ACV has been designing, manufacturing and distributing heating and hot water products for commercial and residential applications since 1922.

In the UK, we formed in 1991, providing and servicing the range of tank-in-tank products to the UK and ROI. Based in Dalgety Bay, Scotland, we supply and support ACV products across the country.

Specialists in stainless steel and home of the patented tank-in-tank concept, we've been developing and manufacturing our range of high performance heating and hot water products for 100 years.

WHAT MAKES OUR PRODUCTS DIFFERENT?

Stainless steel

This material, which resists corrosion in the most aggressive water, has given our products an exceptional service lifetime with minimal maintenance.

Tank-in-tank

The patented tank within a tank is a simple and effective concept that gives you a reliable DHW performance to match the largest of hot water demands.

Electric

Prepare for a carbon free future with electric. Low carbon electric solutions for domestic and commercial projects.

Excellence in hot water

Whilst heating requirements have decreased over the years, the demands of modern life have increased the need for a reliable but at the same time economical and environmentally friendly hot water supply.

Our mission is to use our experience to give you the best technology for generating the hot water you need.

Our motto 'Excellence in hot water' reflects the ambition of our team and partners to fulfil our mission and meet your expectations.

All our hot water products are KIWA approved demonstrating our compliance with UK Water Regulation 4 of the Water Supply (Water Fittings) Regulations 1999.

CONTENTS

GAS FIRED WATER HEATERS

3 WaterMaster Evo 2

COMMERCIAL COMBI BOILERS

5 HeatMaster Evo 2

CONDENSING WALL HUNG BOILERS

7 Evo S

8 Cascade

DOMESTIC ELECTRIC BOILERS

9 E-Tech W

10 E-Tech S

COMMERCIAL ELECTRIC BOILERS

11 E-Tech P

MOBILE ELECTRIC BOILERS

12 E-Tech M

HYDRAULIC DESIGN & SYSTEM SEPARATION

13 Hydraulic separation

14 Brazed plate heat exchangers

DOMESTIC CYLINDERS

15 Smart E

16 Smart E Plus

COMMERCIAL CYLINDERS

17 Smart ME

18 Smart L

19 HRs



Wall mounted condensing boilers with stainless steel heat exchanger technology
40kW to 150kW



Electric boilers
9kW to 259kW



Stainless steel tank-in-tank cylinders
130 to 1000L



Direct gas fired condensing water heaters
Also available as combined heating and hot water unit
25 to 120kW

GAS FIRED WATER HEATERS

WATERMASTER
25 - 120 EVO 2

Direct gas fired condensing water heater.

VIEW MORE PRODUCT INFO HERE

SCAN ME



Features

- Tank in tank heat exchange technology delivers a semi-instantaneous hot water solution meaning that demanding peak loads as well as prolonged continuous use demands are satisfied
- Low hot water storage with rapid heat up and recovery times
- ErP Class A, NOx levels significantly under 40 mg/kWh and operating efficiencies well above the minimum requirements of Part L (2022) ensure an energy efficient installation
- Full range of flue accessories and unvented kits available
- Internal time clock offers the capability to set up to 6 programmes within a 24 hour
- Small footprint allows installation in tight plant rooms
- Integrated legionella protection
- Corrosion-resistant stainless steel heat exchanger and tank reduces maintenance and increases system lifespan
- Supplied with LPG kit for simple on-site conversion

5 year warranty*

WaterMaster Evo				
*All WaterMaster Evos are supplied with a robokit				
Model	**Max Input (kW)**	**Continuous Flow (60°C, l/h)**	**Flue Size**	**Product Code**
WM25 Evo 2	27.8	473	80/125	XB670001
WM35 Evo 2	38.9	662	80/125	XB670002
WM45 Evo 2	50	820	80/125	XB670003
WM70 Evo 2	77.7	1252	100/150	XB670004
WM85 Evo 2	95.4	1520	100/150	XB670005
WM120 Evo 2	127.8	1754	100/150	XB670006


*T&C's apply. Please visit our website for more information.

Dimensions and Clearances

Dimensions			
Boiler	**Height (mm)**	**Width (mm)**	**Depth (mm)**
25 - 45 Evo 2	1780	600	708
70 - 120 Evo 2	2170	690	787


25 - 45 Evo 2

All dimensions in mm.

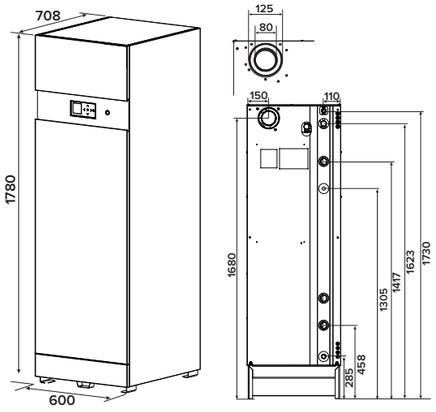

70 - 120 Evo 2

All dimensions in mm.

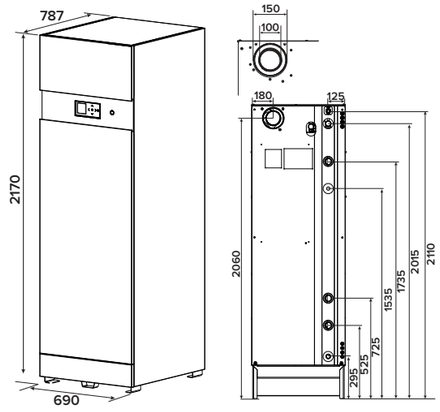

The following minimum clearances must be maintained for operation and servicing:

TOP 300mm

REAR 400mm

SIDES 600mm (left side) & 250mm (right side)

TANK-IN-TANK TECHNOLOGY

FAST HEAT UP

RAPID RECOVERY

REDUCED FOOTPRINT

REDUCED SCALE

LOW STORAGE REQUIRED

MINIMAL HEAT LOSS

COMMERCIAL COMBI BOILERS

HEATMASTER
25 - 120 EVO 2

Commercial Condensing Combi Boiler.

VIEW MORE PRODUCT INFO HERE

SCAN ME



Features

- Commercial combi boiler combining all the benefits of domestic combi boiler technology while comfortably meeting peak commercial DHW demands
- Internal time clock offers the capability to set up to 6 programmes within a 24 hour
- ErP Class A, NOx levels significantly under 40 mg/kWh and operating efficiencies well above the minimum requirements of Part L (2022) ensure an energy efficient installation
- Full range of flue accessories and unvented kits available
- Space and time saving solution due to not needing to install separate boiler and hot water cylinders
- Integrated legionella protection
- Corrosion-resistant stainless steel heat exchanger and tank reduces maintenance and increases system lifespan
- Suited to high demand and critical hot water premises such as hotels and hospitals
- Supplied with LPG kit for simple on-site conversion

5 year warranty*

HeatMaster Evo C/TC				
Model	**Boiler Output (80/60)**	**Continuous Flow (60°C, l/h)**	**Flue Size**	**Product Code**
HM25 Evo 2	24.3kW	473	80/125	XB560001
HM35 Evo 2	34.1kW	662	80/125	XB560002
HM45 Evo 2	44.1kW	820	80/125	XB560003
HM70 Evo 2	68kW	1252	100/150	XB560004
HM85 Evo 2	82.9kW	1520	100/150	XB560005
HM120 Evo 2	111.7kW	1754	100/150	XB560006


*T&C's apply. Please visit our website for more information.

Dimensions and Clearances

Dimensions			
Boiler	**Height (mm)**	**Width (mm)**	**Depth (mm)**
25 - 45 Evo 2	1780	600	708
70 - 120 Evo 2	2170	690	787


25 - 45 Evo 2

All dimensions in mm.

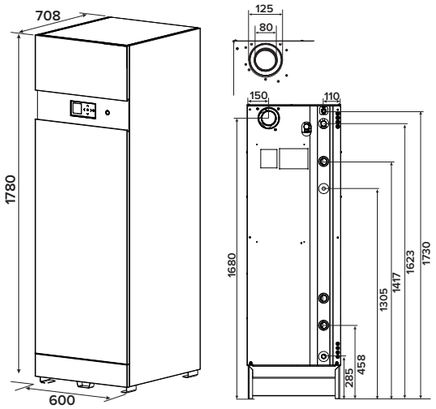

70 - 120 Evo 2

All dimensions in mm.

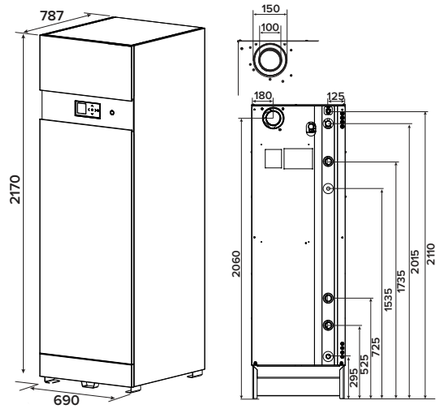

The following minimum clearances must be maintained for operation and servicing:

TOP 300mm

REAR 400mm

SIDES 600mm (left side) & 250mm (right side)

TANK-IN-TANK TECHNOLOGY

FAST HEAT UP

RAPID RECOVERY

REDUCED FOOTPRINT

REDUCED SCALE

LOW STORAGE REQUIRED

MINIMAL HEAT LOSS

CONDENSING WALL HUNG BOILERS

EVO S

Condensing boiler with stainless steel heat exchanger.

VIEW MORE PRODUCT INFO HERE

SCAN ME



Features

- Stainless steel heat exchanger
- NOx class 6 for all models
- 5:1 turndown
- New compact design
- Integrated non-return valve on flue
- Full range of flue accessories and unvented kits available
- 6 bar max operating pressure (80kW and above)
- Powerful heating output through cascade capability
- Full suite of cascade accessories available
- 2022 Part L compliant

5 year warranty*

A

CE

EVO S				
Model	**Boiler Output (80/60) (kW)**	**Boiler Output (50/30) (kW)**	**Flue Size**	**Product Code**
40kW	38.8	42.3	80/125	100008264200
60kW	53.5	58.1	80/125	100008264300
70kW	67.8	73.7	80/125	100008265900
80kW	77.8	84.4	100/150	100008264400
100kW	93.4	101.3	100/150	100008264500
120kW	116.8	127.8	100/150	100008264600
150kW	141.1	154.5	100/150	100008264700

SCAN ME


DOWNLOAD OUR EVO S PRODUCT AND FLUE GUIDE

With full information on the cascade options which go up to 900kW

*T&C's apply. Please visit our website for more information.

Dimensions and Clearances

Boiler	Dimension A	Dimension B	Dimension C	Dimension D
40 - 70kW	487mm	577mm	764mm	408mm
80 - 150kW	487mm	668mm	895mm	408mm

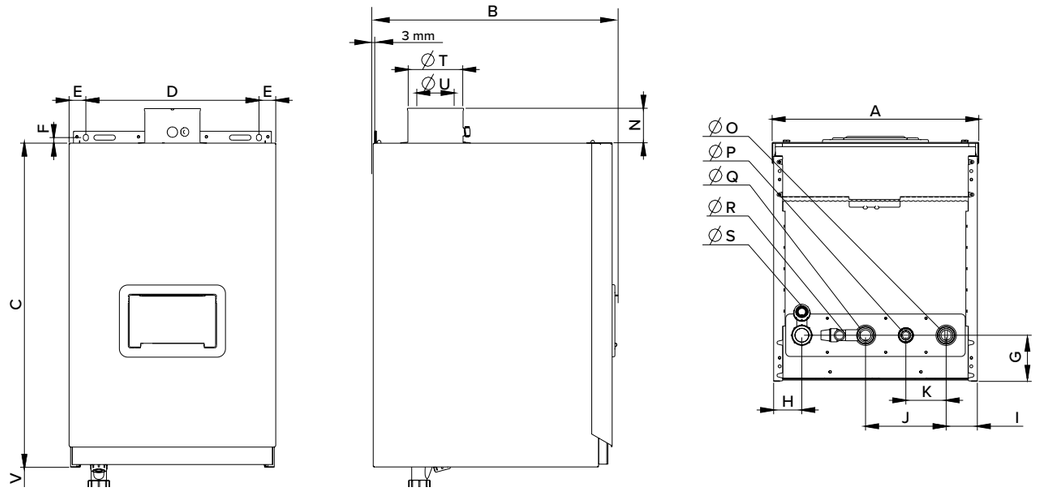

The following minimum clearances must be maintained for operation and servicing:

TOP Between 145 and 450mm depending on flue system type

FRONT 800mm

SIDES 250mm clearance between end boiler and closest wall

EVO S CASCADE

SCAN ME

VISIT OUR CASCADE BUILDER TOOL

Select the products you need for your next project



DOMESTIC ELECTRIC BOILERS

E-TECH W

Wall hung electric system boiler.

VIEW MORE PRODUCT INFO HERE

SCAN ME



Features

- Prepare for a carbon-free future with electric
- Simple installation anywhere in the building due to no flues needed and quiet operation
- Can provide dual temperature outputs for different circuits such as radiators and underfloor heating*
- Protection from electrical surges due to built-in 3 amp MCB
- Integrated circulating pump for speed of installation
- An economical alternative to LPG and Oil for off-grid locations
- Compatible with different electrical system types
- Power output levels can be adjusted to match your demand

Electric boilers

2 year warranty

D

Dimensions			
Boiler	**Height (mm)**	**Width (mm)**	**Depth (mm)**
E-Tech W	763	442	332

E-Tech W			
Model	**Power Supply**	**Max kW Output**	**Product Code**
E-Tech W 09	Single Phase	8.4	A1002095
E-Tech W 15	Single Phase	14.4	A1002096
E-Tech W 09	Three Phase	8.4	A1002092
E-Tech W 15	Three Phase	14.4	A1002090
E-Tech W 22	Three Phase	21.6	A1002091
E-Tech W 28	Three Phase	28.8	A1002093
E-Tech W 36	Three Phase	36	A1002094

E-TECH S

Floor standing electric combination boiler.

VIEW MORE PRODUCT INFO HERE

SCAN ME



Features

- Prepare for a carbon-free future with electric
- Heating and hot water from unit saves space, money, and speeds up installation
- Simple installation anywhere in the building due to no flues needed and quiet operation
- Low maintenance (no annual landlord certification)
- Can be used as a stand alone water heater
- Low standing losses – boiler insulated with rigid polyurethane foam without CFC projected 70mm
- Long life corrosion resistant stainless steel cylinder
- An economical alternative to LPG and Oil for off-grid locations
- Supplied with a Smartpak including a mixing valve

Electric boilers

2 year warranty

D

C XL

C XXL

kiwa CERTIFIED

Dimensions			
Boiler	**Height (mm)**	**Width (mm)**	**Depth (mm)**
E-Tech S 160	1342	590	728
E-Tech S 160	1342	590	728
E-Tech S 240	1818	590	728

E-Tech S					
All E-Tech S models come with a Smartpak 1 or 2 (E-Tech S 240) containing unvented accessories, a mixing valve and a zone valve.					
Model	**Power Supply**	**Max kW Output**	**Continuous Flow (40°C, l/h)**	**Unvented Kit**	**Product Code**
E-Tech S 160	Single Phase	14.4	413	Smartpak 1	XB501600
E-Tech S 160	Three Phase	14.4	413	Smartpak 1	XB501601
E-Tech S 240	Three Phase	28.8	827	Smartpak 2	XB502400
Anti Vacuum Valve	Recommended for all installations				XB050039

COMMERCIAL ELECTRIC BOILERS

E-TECH P

Floor standing, heat only electric boiler.

VIEW MORE PRODUCT INFO HERE

SCAN ME



Features

- Prepare for a carbon free future with electric
- Quick installation with no flues required
- Close load matching with four power stages controlled by stage delay timer
- Robust stove enamelled casing
- Easy to use controls interface – plug and play setup with pre-wired integrated control circuits
- Low maintenance
- Long life high grade incoloy 800 stainless steel heating element
- An economical alternative to LPG and oil for off-grid locations
- Ideal to be used as a temporary heat source or mobile heating
- Suitable to connect to external storage cylinders to produce DHW

Electric boilers

2 year warranty

D

Dimensions			
Boiler	**Height (mm)**	**Width (mm)**	**Depth (mm)**
E-Tech P 57	1495	542	567
E-Tech P 115	1495	542	567
E-Tech P 144	1495	542	567
E-Tech P 201	1495	542	567
E-Tech P 259	1495	542	567

E -Tech P			
Model	**Power Supply**	**Max kW Output**	**Product Code**
E-Tech P 57	Three Phase	57.6	00624201
E-Tech P 115	Three Phase	115.2	00624301
E-Tech P 144	Three Phase	144	00624401
E-Tech P 201	Three Phase	201.6	00624801
E-Tech P 259	Three Phase	259.2	00624501

A safety power cut-out MUST be installed for protection against overheating.

MOBILE ELECTRIC BOILERS

E-TECH M

Mobile electric boiler for heating and screed drying.

VIEW MORE PRODUCT INFO HERE

SCAN ME



Features

- 6 different power levels with automatic power detection system
- Robust bull bar
- Integrated 4.3” touch screen
- 4 different screed drying programs, up to 60 days, easily created and saved
- Data exportable to USB stick
- Plug and play
- Internal components easily accessible for maintenance or replacement
- Heat exchanger with a accessible port for easy cleaning of the interior
- Rear protection bar, sold with screws for mounting (optional)

Dimensions			
Boiler	**Height (mm)**	**Width (mm)**	**Depth (mm)**
E-Tech M	1116	512	571

E-Tech M			
Boiler	**Power Supply**	**Max kW Output**	**Product Code**
E-Tech M	Single & Three Phase	3-36kW	100005282300

Electric boilers

1 year warranty



Cables

Reference	100005282700	100005282800	100005283000	100005282700	100005282900	100005283100
Type	1 x 16A	1 x 32A	1 x 63A	3 x 16A	3 x 32A	3 x 63A
IP rating	IP44	IP44	IP44	IP44	IP44	IP44
Total Length	140cm	140cm	140cm	140cm	140cm	140cm
Type of Network	1x230Vac	1x230Vac	1x230Vac	3x400Vac (+N)	3x400Vac (+N)	3x400Vac (+N)
Max kW Output	3kW	6kW	12kW	9kW	18kW	36kW

Accessories

Reference	100005282500
Description	Rear protection bumper
Sold with screws for installation	

HYDRAULIC SEPARATION

Using Plate Heat Exchangers

Over time, heating systems naturally accumulate debris, dirt and other contaminants. When connecting a new boiler to an older system, allowing this 'dirty' water to pass through the new appliance can reduce efficiency and increase the risk of breakdowns.

Plate heat exchangers provide an effective solution by creating a clear hydraulic break between the old system water and the new boiler circuit, protecting equipment performance and ensuring long term reliability.

How plate heat exchangers work

Heat is transferred through **thin, corrugated plates** arranged to form channels for independent water flow.

The following two types of plate heat exchanger are commonly installed onto heating systems:

- **Gasketed** units feature plates sealed within a frame using elastomeric gaskets.
- **Brazed** units eliminate gaskets entirely, enabling **higher design pressures and temperatures** in a compact footprint.

Identifying the right plate heat exchanger

To achieve optimal performance, correct sizing is essential. Key factors include:

- Required **heat transfer capacity**
- Temperature profiles on both sides of the plate
- Permit the two sides to operate at **different pressures.**

These determine how effectively the unit will perform, so accurate selection is crucial. ACV UK recommends consulting their team for guidance when selecting a plate heat exchanger.

Why choose a plate heat exchanger?

Plate heat exchangers offer more than system cleanliness - they enable **complete operational flexibility:**

- **Protect boiler equipment** from contaminants in older or lower quality system water.
- Allow the boiler and secondary circuits to run at **different temperature profiles.**
- Permit the two sides to operate at **different pressures.**
- Enable heating of **specialist fluids** in the secondary circuit, such as process or food grade fluids not suitable for direct boiler contact.



BRAZED PLATE HEAT EXCHANGERS

ACV offer a range of brazed heat exchangers for installation on HeatMaster Evo 2, Evo S, E-Tech W and E-Tech P heating systems.

This method of complete system hydraulic separation ensures optimum heat transfer efficiency and low resistance within a compact footprint.

Features and benefits

- Compact design
- No gaskets
- Low maintenance and self-cleaning
- All units are pressure tested
- Ensures optimal heat transfer efficiency and pressure resistance
- Separates system water from the boiler
- Ensures the highest perfomance for longest possible service life

The range of pre-sized PHEXs are suitable for installation with HeatMaster Evo 2, E Tech W and E Tech P boilers, and are available as kits for Evo S boilers with pre-sized pipework for easy installation onto Evo S frame and header kits. Primary operating temperatures of 85/65°C boiler side and 75/55°C secondary side. Please contact ACV to discuss other operating temperature profiles or larger cascade thermal inputs.

The below table lists the ACV range of PHEXs pre-sized for HeatMaster Evo 2 models only.

Plate Heat Exchangers		
Total Cascade Input (kW)	**PHEX Description**	**Product Code**
Up to 60kW	HM Evo 2 60kW PHEX	XBACV108010
Up to 150kW	HM Evo 2 150kW PHEX	XBACV108013
Up to 300kW	HM Evo 2 300kW PHEX	XBACV108016
Up to 450kW	HM Evo 2 450kW PHEX	XBACV108019

Please get in touch with ACV for all sizing enquiries related to the E-Tech electric boilers.

DOMESTIC CYLINDERS

SMART E
130 - 160

Stainless steel indirect cylinder for domestic hot water.

VIEW MORE PRODUCT INFO HERE

SCAN ME



Features

- Integrated legionella protection
- Fits through a standard doorway for access to plant room
- Supplied with 3kW immersion heater (6kW option available)
- Suitable for unvented systems – supplied as a complete package with Smartpak 1 including 3.5 bar mains unvented kit
- Maximise capacity of the cylinder with DHW mixing valve and 2 port valve supplied as standard

5 year warranty*

Tank-in-tank

B

Dimensions			
Boiler	**Height (mm)**	**Width (mm)**	**Depth (mm)**
Smart E 130	1024	565	565
Smart E 160	1225	565	565

Smart E stainless steel indirect cylinder				
*All Smart E cylinders come with unvented accessories, a domestic mixing valve, a zone valve and a 3kW immersion.				
Model	**Energy Efficiency Storage Class**	**Continuous Flow (60°C)**	**Unvented Kit**	**Product Code**
SLE 130	B	320	Smartpak 1	XB301300
SLE 160	B	465	Smartpak 1	XB301600

*T&C's apply. Please visit our website for more information.

SMART E PLUS
210 - 300

Stainless steel indirect cylinder with the addition of multiple ports for use with multi energy sources for domestic hot water.

VIEW MORE PRODUCT INFO HERE

SCAN ME



Features

- Integrated legionella protection
- Suitable for unvented systems – supplied as a complete package with Smartpak 1 or 2 including 3.5 bar mains unvented kit
- Maximise capacity of the cylinder with DHW mixing valve and 2 port valve supplied as standard
- Supplied with 3kW immersion heater (6kW option available)

5 year warranty*

Tank-in-tank

B

Dimensions			
Boiler	**Height (mm)**	**Width (mm)**	**Depth (mm)**
SLE+210	1489	565	565
SLE+240	1738	565	565
SLE+300	2050	565	565

Smart E Plus stainless steel indirect cylinder with additional ports				
*All Smart E Plus cylinders come with unvented accessories, a domestic mixing valve and a zone valve				
Model	**Energy Efficiency Storage Class**	**Continuous Flow (60°C)**	**Unvented Kit**	**Product Code**
SLE+ 210	B	576	Smartpak 1	XB302100
SLE+ 240	B	769	Smartpak 1	XB302400
SLE+ 300	B	970	Smartpak 2	XB303000

*T&C's apply. Please visit our website for more information.

COMMERCIAL CYLINDERS

SMART ME
200 - 800

Stainless steel indirect cylinder with additional coil for use with multi energy sources for domestic hot water.

VIEW MORE PRODUCT INFO HERE

SCAN ME



Features

- Ideal for use with renewable energy such as heat pumps, solar, heat recovery and in district heating schemes due to large primary store
- Can provide dual temperature outputs for different circuits such as underfloor heating (low temperature) and DHW (high temperature)
- Suitable for unvented systems – supplied as a complete package including 3.5 bar mains unvented kit*
- Maximise capacity of the cylinder with DHW mixing valve and 2 port valve supplied as standard*
- Supplied with 3kW immersion heater* (6kW option available)

5 year warranty*

Tank-in-tank

B C

Dimensions			
Boiler	**Height (mm)**	**Width (mm)**	**Depth (mm)**
SLME 200	1500	565	565
SLME 300	1610	675	675
SLME 400	1950	675	675
SLME 600	1890	910	910
SLME 800	2000	990	990

Smart ME stainless steel indirect cylinder with additional coil				
*Smart ME cylinders up to 600L come with unvented accessories, a domestic mixing valve and a zone valve. Accessories for the Smart ME 800 must be ordered separately.				
Model	**Energy Efficiency Storage Class**	**Continuous Flow (60°C)**	**Unvented Kit**	**Product Code**
SLME 200	B	450	Smartpak 1	XB312000
SLME 300	C	461	Smartpak 2	XB313000
SLME 400	C	614	Smartpak 2	XB314000
SLME 600	-	693	Smartpak 2	XB316000
SLME 800	-	1037	-	06625301

*T&C's apply. Please visit our website for more information.

SMART L
320 - 600

Stainless steel indirect cylinder for domestic hot water.

VIEW MORE PRODUCT INFO HERE

SCAN ME



Features

- Cost effective solution, simple installation with no de-stratification kit needed and no flue requirements
- Low maintenance with no anode protection required
- Low standing losses – cylinder comes with polyurethane foam insulation and hard-wearing polypropylene finish
- Integrated legionella protection
- Long life corrosion resistant stainless steel cylinder
- Simplified wiring with 'plug and play' electrical connection
- Suitable for vented or unvented systems (optional Systempak unvented kit required)
- Smaller models (SL 320-420) fit through a standard doorway for ease of access to plant room

5 year warranty*

Tank-in-tank

C

Dimensions			
Boiler	**Height (mm)**	**Width (mm)**	**Depth (mm)**
320	1602	673	673
420	2024	673	673
600	1901	817	817

Smart L Stainless steel indirect cylinder			
Unvented accessories must be purchased separately			
Model	**Energy Efficiency Storage Class**	**Continuous Flow (60°C)**	**Product Code**
SL320	C	1037	06618594
SL420	C	1153	06618694
SL600	-	1232	06619301

*T&C's apply. Please visit our website for more information.

HRS
800 - 1000

Stainless steel indirect cylinder for domestic hot water.

VIEW MORE PRODUCT INFO HERE

SCAN ME



Features

- Fast heat up and recovery using the unique tank-in-tank design
- Large heating surface area reduces boiler cycling
- Integrated legionella protection
- Suitable for vented or unvented systems (Systempak unvented kit required)
- Cost effective solution, simple installation with no de-stratification kit needed and no flue requirements

5 year warranty*

Tank-in-tank

CE

Dimensions			
Boiler	**Height (mm)**	**Width (mm)**	**Depth (mm)**
HRs 800	1955	980	980
HRs 1000	2355	980	980

HRs Stainless steel indirect cylinder			
Model	**Energy Efficiency Storage Class**	**Continuous Flow (60°C)**	**Product Code**
HRs 800	-	1395	06633001
HRs 1000	-	1562	06633101

*T&C's apply. Please visit our website for more information.

CASE STUDY

Loughborough CofE Primary School.

Background

Loughborough CofE Primary School is a one-form entry school in Leicestershire with approximately 205 pupils. Like many educational institutions, it depends on a reliable heating and hot water system to ensure comfort and hygiene across classrooms, kitchens, and shared facilities.

Challenge

Loughborough CofE Primary School's heating and hot water had previously been provided by two ageing atmospheric boilers. The units had reached the end of their service life and spare parts were no longer available, which made ongoing maintenance impractical and reliability a major concern. The school needed a modern solution that would deliver consistent performance and improved energy efficiency, without causing disruption to students or staff during installation.

Solution

Working with Trevor Betts, Business Development Manager from ACV, Ashwell Maintenance installed two Evo S 120kW condensing boilers mounted on a frame kit with a low loss header, alongside a WaterMaster 70 Evo gas-fired water heater. The new equipment was installed within the school's existing plant room at the front of the building, allowing for a smooth upgrade with minimal interference to day-to-day operations. Thanks to the simple configuration and intuitive design of the units, commissioning was completed quickly, ensuring the system was fully functional in time for the new school term.

The Evo S condensing boilers and WaterMaster Evo gas-fired water heater were selected for their compact footprint and ease of integration.

The WaterMaster's high recovery rate was also particularly beneficial for the school environment, supporting consistent hot water availability in kitchens and hand washing areas, even during peak usage.

Charlie Swift of Ashwell Maintenance explained, *"The new appliances are essentially turn-key in terms of commissioning and operation. Their straightforward design meant we could complete the works efficiently and deliver a reliable system ready for the start of term."*

Outcome

Loughborough CofE Primary School now benefits from a modern, energy efficient system designed for long term performance. Going forward, the school can expect reduced energy consumption, lower maintenance requirements and consistent hot water delivery.

Reflecting on the project, Charlie Swift concluded, *"The Evo S is a standout boiler on the market. As a breakdown and service engineer, it's great to have a product that is easy to service with excellent diagnostics and access to all parts".*



Evo S 120kW (x2), WaterMaster 70 Evo

TALK TO US TODAY

01383 820100

uk.sales@acvuk.com | acv.com/gb

PRODUCT TRAINING

We have product training courses to suit all abilities and needs.

The product training covers our core product technologies:

- Commercial Domestic Hot Water
- Commercial Condensing Gas Boilers
- Electric Boilers

SCAN THE QR CODE
to book onto any of our upcoming training sessions today!

SCAN ME

Or book by visiting our website here:
acv.com/gb/page/product-training



CIBSE APPROVED CPD COURSE

Are you looking to develop more knowledge in hot water and heating products?

Take a look at the **ACV CIBSE approved CPD** courses available to you.

CIBSE CPD

SCAN THE QR CODE
to book onto a CIBSE approved CPD course

SCAN ME

Or book by visiting our website here:
acv.com/gb/page/cibse-accredited-cpd-course

We also have **Lunch and Learn** sessions available across a number of different topics. Speak to your local Business Development Manager for more information.

TRAINING AND SUPPORT

Here at ACV UK we understand installing a boiler and/or water heater represents a significant investment.

VISIT OUR WEBSITE
TO ENQUIRE FOR ANY TRAINING COURSES

We offer a range of services for our customers.

- A library of sales literature and technical documentation
- A series of training programmes covering all aspects of our business and products
- Local technical support
- Local assistance for more complex start-ups
- Site surveys available on request

SUPPORT AVAILABLE

BIM MODELS AVAILABLE

CONTACT US

Contact your local sales representative for more information:

uk.sales@acvuk.com
(0)1383 820100

ACV (UK) LTD
St. David's Drive, St. David's Business Park,
Dalgety Bay, Fife, KY11 9PF
uk.sales@acvuk.com | acv.com/gb

acv.com/gb |

ACV does not accept any liability from errors or omissions within, and reserve the right to alter technical specification and components without prior notice.

ACV_Product Overview_RevE_October_2026

*For more information please visit acv.com/gb